



AQ-6412

12-Light Metal Halide Fiber Optic Lighting Kit

Revision 5/23/06 AQ-6412.pdf

Type:
Job:

Approvals:
Date:
Page 1 of 1

Specifications

Illuminator: High-Impact Outdoor Grade Polycarbonate Housing; 120VAC, 60Hz; 200 Watts Max; 4.4 Amps Start Current; 1.8 Amps Run Current

Lamp: Proprietary Design HID Metal Halide 6000 hrs average life IX-B150MH

Fiber Optic Cable Harness: (12) pre-assembled fiber optic cables with black pvc jacket.

Cable Lengths:

Length	10 ft	12 ft	18 ft	20 ft	22 ft
Qty	2	4	2	2	2

Stealth Stands: Qty (12) pedestal base Stealth Stands included with kit.
Base diameter: 3.57"; OAH: 3.3"
Fiber Head (Fixture) Diameter: 0.57"

Ordering Information:


- AQ-6412:** Four Position Color Wheel: White, Green, Blue, Magenta

Applications:

Self-Contained Kit for illuminating ponds, streams, waterfalls, marginal plants, landscape features, and other objects of interest.

Optional Equipment:

- AQ-RM6000:** Wireless Remote Control
- AQ-LS:** Landscape Stake
- AQ-TP-25:** Threaded Mounting Post
- GS02:** Brass Glare Shield

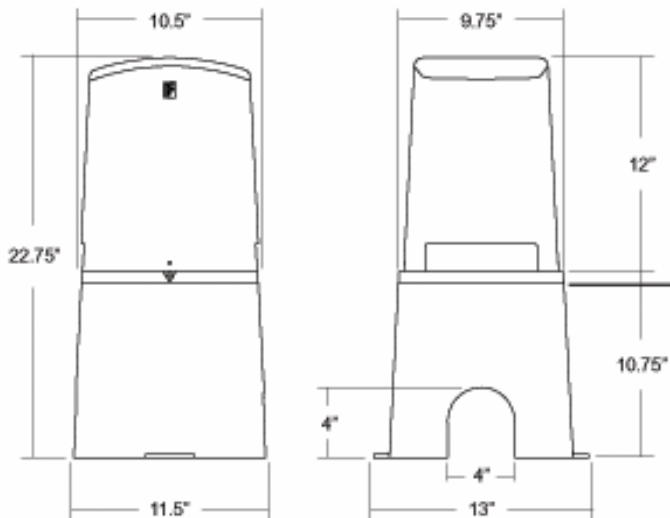

Patent No. 7,004,641

Illuminator



Fiber Optic Cable Harness (shown with (4) cables)



Stealth Stand

