



# IFX-7408

## 8-Light Metal Halide High Output Fiber Optic Lighting Kit

Revision 1/16/07 IFX-7408Jan07.pdf

Type:  
Job:

Approvals:  
Date:  
Page 1 of 1

### Specifications

**Illuminator:** High-Impact Outdoor Grade Polycarbonate Housing; 120VAC, 60Hz; 200 Watts Max; 4.4 Amps Start Current; 1.8 Amps Run Current

**Lamp:** Proprietary Design HID Metal Halide 6000 hrs average life

**Fiber Optic Cable Harness:** (8) pre-assembled high output (EEF-50) fiber optic cables with black pvc jacket.

**Cable Lengths:**

Length	20 ft	30 ft	40 ft
Qty	2	4	2

**Stealth Stands:** Qty (8) pedestal base black anodized aluminum Stealth Stands included with kit. Base diameter: 3.57"; OAH: 3.3" Fiber Head (Fixture) Diameter: 0.57" Fixture Material: Brass

### Ordering Information:


**IFX-7408:** Four Position Color Wheel: White, Green, Magenta, Blue

### Applications:

Self-Contained Kit for illuminating ponds, streams, waterfalls, marginal plants, landscape features, and other objects of interest.

### Optional Equipment:

- AQ-RM6000:** Wireless Remote Control
- AQ-LS:** Landscape Stake
- AQ-TP-25:** Threaded Mounting Post
- GS02:** Brass Glare Shield

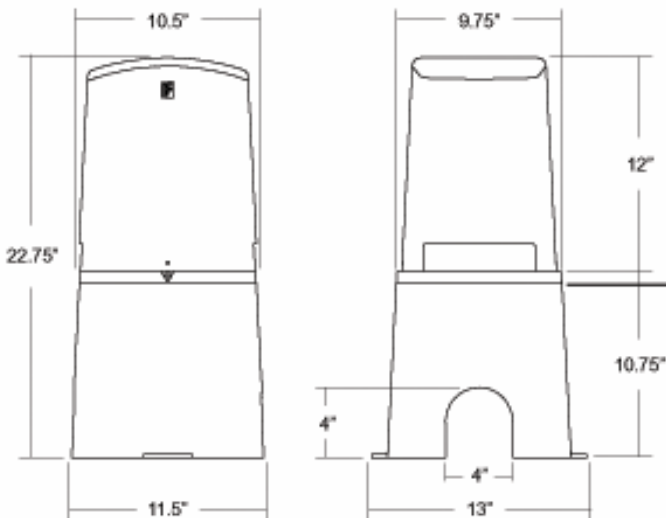

Illuminator



Fiber Optic Cable Harness (shown with (4) cables)



Stealth Stand

